# **Microsoft**

98-381 Exam

**Introduction to Programming Using Python Exam** 

# Demo

# Version: 8.1

## Question: 1

#### **HOTSPOT**

You are writing a Python program to validate employee numbers.

The employee number must have the format ddd-dd-dddd and consist only of numbers and dashes.


The program must print True if the format is correct and print False if the format is incorrect.

How should you complete the code? To answer, select the appropriate code segments in the answer area.

#### Answer Area

```
Employee_number = ""
Employee_number = "sentinel"
parts = ""
                                    V
while employee number != "":
while employee_number != "sentinel":
 valid = False
 valid = True
 employee_number = input("Enter employee number (ddd-dd-dddd): ")
 parts = employee number.split('-')
 if len(parts) == 3:
      if len(parts[0]) == 3 and len(parts[1]) == 2 and len(parts[2]) == 4:
            if parts[0].isdigit() and parts[1].isdigit() and parts[2].isdigit():
                       valid = False
                       valid = True
    print(valid)
```

A	nswer:	

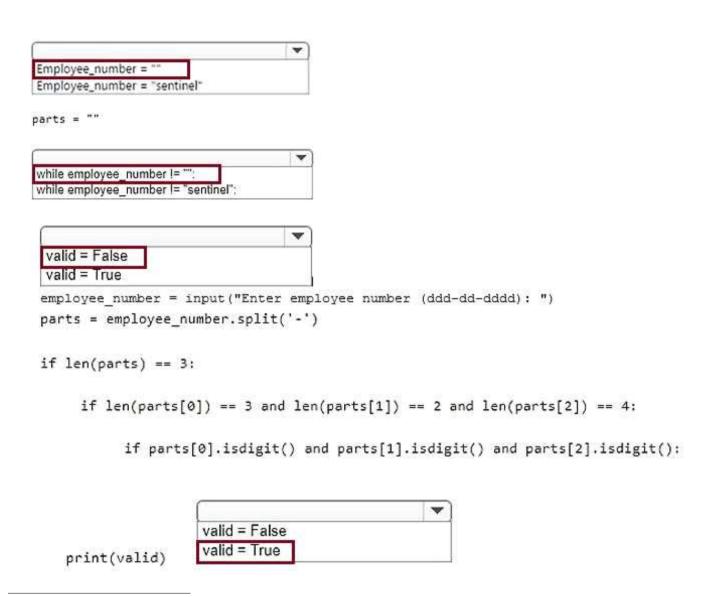

### Question: 2

#### **HOTSPOT**

You are coding a math utility by using Python.

You are writing a function to compute roots.

The function must meet the following requirements:

If a is non-negative, return a\*\*(1/b)

If a is negative and even, return "Result is an imaginary number" If a is negative and odd, return -(-a)\*\*(1/b)

How should you complete the code? To answer, select the appropriate code segments in the answer area.

def safe\_root(a, b):

```
if a >= 0:

if a % 2 == 0:

else:

elif:
```

answer =  $a^{**}(1/b)$ 

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

answer = "Result is an imaginary number"

```
if a >= 0:
if a % 2 == 0:
else:
elif:
answer = -(-a) ** (1/b)
```

$\overline{}$		Ο Δ	
	uestions	χ, Δηςιλ	IPLS PLIF

Page 5

def safe\_root(a, b):

```
(if a >= 0:)
if a % 2 == 0:
else:
elif:
```

answer =  $a^{**}(1/b)$ 

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

```
if a >= 0:

if a % 2 == 0:

else:

elif:
```

answer = "Result is an imaginary number"

```
if a >= 0:
if a % 2 == 0:
else:
elif:
```

return answer

#### References:

https://www.w3resource.com/python/python-if-else-statements.php

## Question: 3

#### **HOTSPOT**

You work for a company that distributes media for all ages.

You are writing a function that assigns a rating based on a user's age. The function must meet the following requirements:

Anyone 18 years old or older receives a rating of "A"

Anyone 13 or older, but younger than 18, receives a rating of "T"

Anyone 12 years old or younger receives a rating of "C"

If the age is unknown, the rating is set to "C"

You need to complete the code to meet the requirements.

```
def get_rating(age):
      rating = ""
      if [
      eli age < 13: rating = "C"
      age < 18: rating = "T"
eli: rating = "A"
      els age == None: rating = "C"
      return rating
def get_rating(age):
     rating = ""
     if
    elif
    elif age < 13: rating = "C"
           age < 18: rating = "T"
    else : rating = "A"
     retur age == None: rating = "C"
 def get rating(age):
      rating = ""
      if
      elif
      elif
     else age < 13: rating = "C"
            age < 18: rating = "T"
      retur : rating = "A"
            age == None: rating = "C"
def get_rating(age):
    rating = ""
    if
    elif
    elif
    else
```

$\overline{}$		Ο Δ	
	uestions	χ, Δηςιλ	IPLS PLIF

Page 9

Δn	SW	٥r		
<i>_</i>	344		•	

```
def get_rating(age):
      rating = ""
      if
      eli age < 13: rating = "C"
         age < 18: rating = "T"
          : rating = "A"
      els age == None: rating = "C"
      return rating
def get_rating(age):
     rating = ""
     if
     elif
     elif age < 13 rating = "C"
           age < 18; rating = "T"
     else : rating = "A"
     retur age == None; rating = "C"
 def get_rating(age):
      rating = ""
      if
      elif
      elif
            age < 13; rating = "C"
      else
            age < 18: rating = "T"
      retur : rating = "A"
            age == None: rating = "C"
def get_rating(age):
    rating = ""
```

References:
-------------

https://www.w3resource.com/python/python-if-else-statements.php

## Question: 4

**HOTSPOT** 

You are designing a decision structure to convert a student's numeric grade to a letter grade. The program must assign a letter grade as specified in the following table:

Percentage range	Letter grade
90 through 100	A
80 through 89	В
70 through 79	С
65 through 69	D
0 through 64	F

For example, if the user enters a 90, the output should be, "Your letter grade is A". Likewise, if a user enters an 89, the output should be "Your letter grade is B".

How should you complete the code? To answer, select the appropriate code segments in the answer area.

```
#Letter Grade Converter
grade = int(input("Enter a numeric grade"))
if grade <= 90:
if grade > = 90:
elif grade > 90:
elif grade >= 90:
      letter_grade = 'A'
if grade > 80:
if grade >= 80:
elif grade > 80:
elif grade >= 80:
       letter_grade = 'B'
 if grade > 70:
 if grade >= 70:
 elif grade > 70:
 elif grade >= 70:
       letter_grade = 'C'
 if grade > 65:
 if grade >= 65:
 elif grade > 65:
 elif grade >= 65:
```

letter\_grade = 'D'

Answer:	

```
#Letter Grade Converter
grade = int(input("Enter a numeric grade"))
if grade <= 90:
(if grade > = 90:)
elif grade > 90:
elif grade > = 90:
      letter_grade = 'A'
if grade > 80:
 if grade >= 80:
 elif grade > 80:
elif grade >= 80:
       letter_grade = 'B'
 if grade > 70:
 if grade >= 70:
 elif grade > 70:
 elit grade >= /0:
       letter_grade = 'C'
 if grade > 65:
 if grade >= 65:
 elif grade > 65:
 elif grade >= 65:)
```

letter\_grade = 'D'

References:

https://www.w3resource.com/python/python-if-else-statements.php